

SunPower Performance 7

Home Solar Panel

500-515 W | SPR-P7-XXX-BLK-P

 One-third cut, shingled-cell design

 Framed glass-glass

 Bifacial energy generation

 Hail: 40 mm (27.5 m/s)

 Fire Rating: Class A (IEC/UL)

High lifetime energy production

The shingled-cell design helps to manage shade and keep cell temperatures low to produce more power over time.

Made for real weather

Its strong frame and cell connection design helps to protect the panels against weather challenges like temperature swings, snow loads, and hail.

No sacrifices for curb appeal

Smaller metallic wires help to achieve a sleek black appearance to seamlessly integrate into your roof.

Sustainable at its core

Make a responsible choice for both your home and the planet with sustainably manufactured Performance panels, which are Cradle to Cradle Bronze Certified®. SunPower designs panels with sustainability in mind – from materials and manufacturing to conflict tracing and zero tolerance of labour rights violations.



A better product, a better warranty

SunPower Performance 7 panels are covered by a 30-year warranty.¹ Manufactured for long-term durability—covering defects related to workmanship and materials for a full 30 years.

Product and power coverage	30 Years
Year 1 minimum warranted output	99.0%
Maximum annual degradation	0.4%

SUNPOWER

Learn more about SunPower Performance panels
www.sunpowerglobal.com



Performance 7 POWER: 500–515 W | EFFICIENCY: Up to 22.8%

Electrical Data, Front STC Characteristics ²			
	SPR-P7-515-BLK-P	SPR-P7-510-BLK-P	SPR-P7-500-BLK-P
Nominal Power (Pnom) ³	515 W	510 W	500 W
Power Binning	+3/0%	+3/0%	+3/0%
Panel Efficiency	22.8%	22.5%	22.1%
Rated Voltage (Vmpp)	39.96 V	39.69 V	39.16 V
Rated Current (Impp)	12.89 A	12.85 A	12.77 A
Open-Circuit Voltage (Voc) ³	47.17 V	47.00 V	46.67 V
Short-Circuit Current (Isc) ³	13.59 A	13.56 A	13.50 A


Bifacial Gain ⁴			
Pmax with 5% Bifacial Gain	541 W	536 W	525 W
Isc with 5% Bifacial Gain	14.27 A	14.24 A	14.18 A
Pmax with 10% Bifacial Gain	567 W	561 W	550 W
Isc with 10% Bifacial Gain	14.95 A	14.92 A	14.85 A
Pmax with 20% Bifacial Gain	618 W	612 W	600 W
Isc with 20% Bifacial Gain	16.31 A	16.27 A	16.20 A

BNPI Data ⁵			
Nominal Power (Pmax) ³	564 W	559 W	548 W
Open-Circuit Voltage (Voc) ³	47.29 V	47.15 V	46.81 V
Short-Circuit Current (Isc) ³	14.89 A	14.86 A	14.79 A

Electrical Data		Mechanical Data	
Bifaciality ($\varphi P_{max}/\varphi I_{sc}$)	80% +/-10%	Solar Cells	N-type TOPCon
Bifaciality (φV_{oc})	98% +/-2%	Glass	2.0 mm + 2.0 mm, high transmission heat strengthened glass, AR coating on front glass
Maximum System Voltage	1500 V IEC	Junction Box	IP-68, 3 bypass diodes
Testing Temperature	-40°C to +85°C	Connector	Stäubli MC4-EVO2A
Maximum Series Fuse	25 A	Weight	27.5 kg
Power Temp. Coef.	-0.29% / °C	Max. Load ⁷	Wind: 2400 Pa, 245 kg/m ² front & back Snow: 5400 Pa, 550 kg/m ² front
Voltage Temp. Coef.	-0.25% / °C	Impact Resistance	40 mm diameter hail at 27.5 m/s
Current Temp. Coef.	0.045% / °C	Frame	Black anodized aluminum alloy

Packaging Configuration	
Number of modules per pallet	36
Number of pallets per 40ft HQ container	22
Number of modules per container	792

Tests And Certifications	
Standard Tests	IEC 61215, IEC 61730
Fire Rating	Class A (IEC 61730-2 / UL 790)
Protection Class	Class II (IEC 61140)
Quality Certs	ISO 9001:2015, ISO 14001:2015
EHS Compliance	ISO 45001-2018, Recycling Scheme
Ammonia Test	IEC 62716
Dust and Sand	IEC 60068-2-68
Salt Spray Test	IEC 61701 (Test Method 8)
LeTID Test	IEC TS 63342
PID Test	IEC 62804
Cradle to Cradle Certified™ Bronze	Panel line certified for material health, water stewardship, material reutilization, renewable energy & carbon management, and social fairness. ⁶

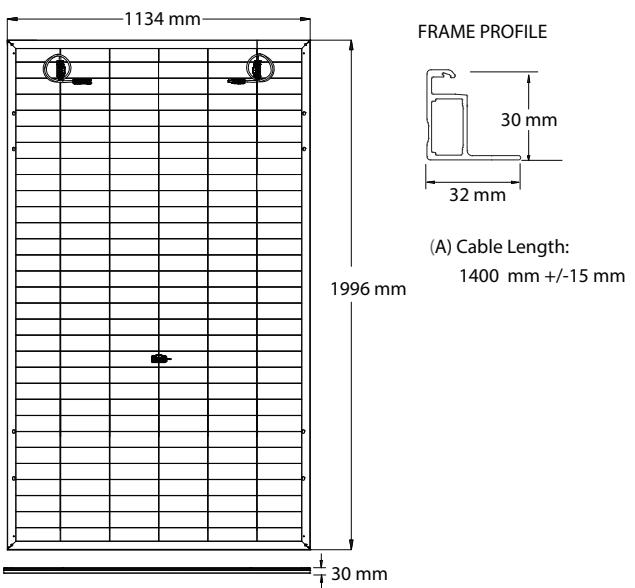

1 The SPR-P7-BLK-P solar panels are backed by a 30-year warranty. Subject to terms and conditions. Not available in all countries. 30-year warranty requires registration, otherwise our 25-year warranty applies. Not available for earlier generation Performance panels, where a 25-year warranty applies.

2 Standard Test Conditions (1000 W/m² irradiance, AM 1.5, 25° C). NREL calibration Standard: SOMS current, LACCS FF and Voltage.

3 Measurements tolerance +/-3%.

4 The additional gain from the back side of the panel compared to the power of the front side of the panel at the standard test conditions. It depends on mounting (structure, height, tilt angle etc.) and albedo of the underlying surface.

5 BNPI Test Condition (front 1000 W/m², rear 135W/m² irradiance, AM 1.5, 25° C).

6 Performance DC panels are Cradle to Cradle Certified™ Bronze - www.c2ccertified.org/certified-products/maxeon-performance-solar-panels. Cradle to Cradle Certified™ is a certification mark licensed by the Cradle to Cradle Products Innovation Institute.

7 Test load as per IEC 61215-2 is equal to design load with safety factor = 1.5. See "Safety and Installation Instructions" for details.

Designed in U.S.A.
Assembled in China

Specifications included in this datasheet are subject to change without notice.
©2025 TCL SunPower Global. All Rights Reserved.



Please read the safety and installation instructions.
Visit www.sunpowerglobal.com/PVInstallGuide.
Paper version can be requested through
techsupport.EN@sunpowerglobal.com

SUNPOWER